


QSD-2160N

SILICON PIN PHOTODIODE

COMMON ANODE TYPE PIN PHOTO DIODE.
HIGH SPEED SENSITIVITY.

- **DIE SIZE** 1.60mm × 1.60mm
- **DIE THICKNESS** 400 ± 15μm
- **METALLIZATION**
 - TOP Al
 - BOTTOM Au
- **PASSIVATION** Silicon Nitride
- **BONDING PAD SIZE**
 - CATHODE (TOP) 300μm × 300μm
 - ANODE (BOTTOM)

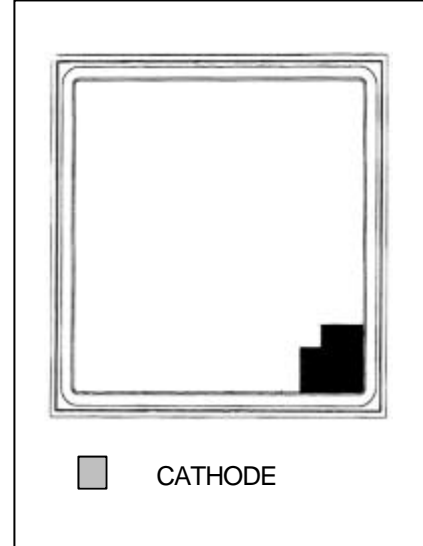

• **ABSOLUTE MAXIMUM RATINGS (Ta= 25° C)**

Parameter	Symbol	Maximum rating	Unit
Reverse Breakdown Voltage	B _{VR}	-35	V
Junction Temperature	T _J	150	°C

• **ELECTRICAL / OPTICAL CHARACTERISTICS (Ta= 25° C)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Open Circuit Voltage	V _{OP}	Note(1)	-0.3	-0.32		V
Short Circuit Current	I _{SC}	Note(1)	-16	-20		μA
Spectrum Sensitivity	λ		430 ~ 1,090			nm
Peak Sensing Wavelength	λ _P			880		nm
Forward Voltage	V _F	I _F =100 mA		-1.3	-1.5	V
Dark Current	I _D	V _R =10V		-5	-10	nA
Reverse Breakdown Voltage	B _{VR}	I _R =10μA	-50	-80		V

Note(1): Parallel light of 1,000 Lux illumination is applied by a Tungsten lamp of 2856k.